


1436/10.50.7,5.4

DESCRIPTION

TECHNICAL DATA AND DIMENSIONS

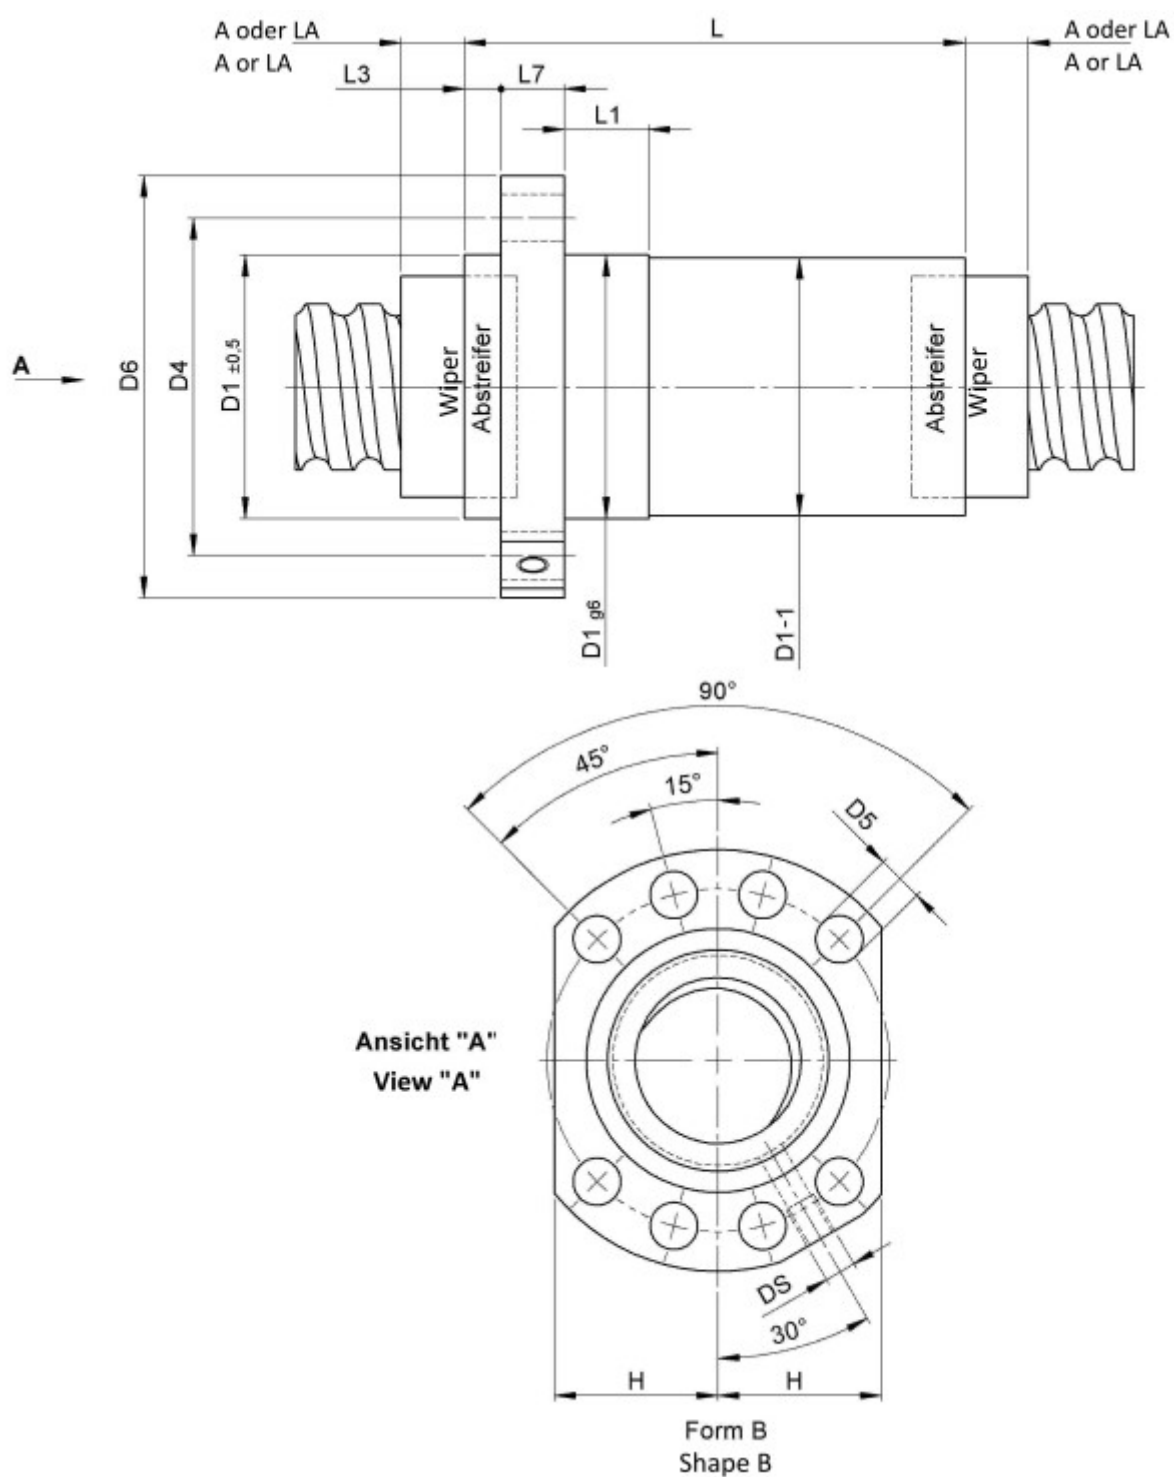

Series			1436	Friction torque TO	[Ncm]	140,2	
Nominal diameter	[mm]	dN	50	Accuracy		T	
Lead	[mm]	P	10	Preload/backlash free/with backlash		with backlash	
Ball circles		i	1x4	Nut length	[mm]	L	99
Ball diameter	[mm]	dW	7,5	Dynamic load capacity	[kN]	Ca	67,40
DN-value			125000	Static load capacity	[kN]	C0a	124,30
No. of starts			1	Pilot diameter	[mm]	D1	75
Friction torque FROM	[Ncm]		75,5				

August Steinmeyer GmbH & Co. KG | Riedstraße 7 | 72458 Albstadt | Phone +49 (0) 7431 1288-0 | Fax +49 (0) 7431 1288-89 | info@steinmeyer.com

Drive Technology, Ball Screws, Precision Ball Screws, Miniature Ball Screws, Ultra Thrust Ball Screws, Rotating Nuts, Cooled Ball Screws, Precision Lead Screws, Differential Rolled Screws, Rolled Ball Screws