


1556/20.63.11.4

DESCRIPTION

TECHNICAL DATA AND DIMENSIONS

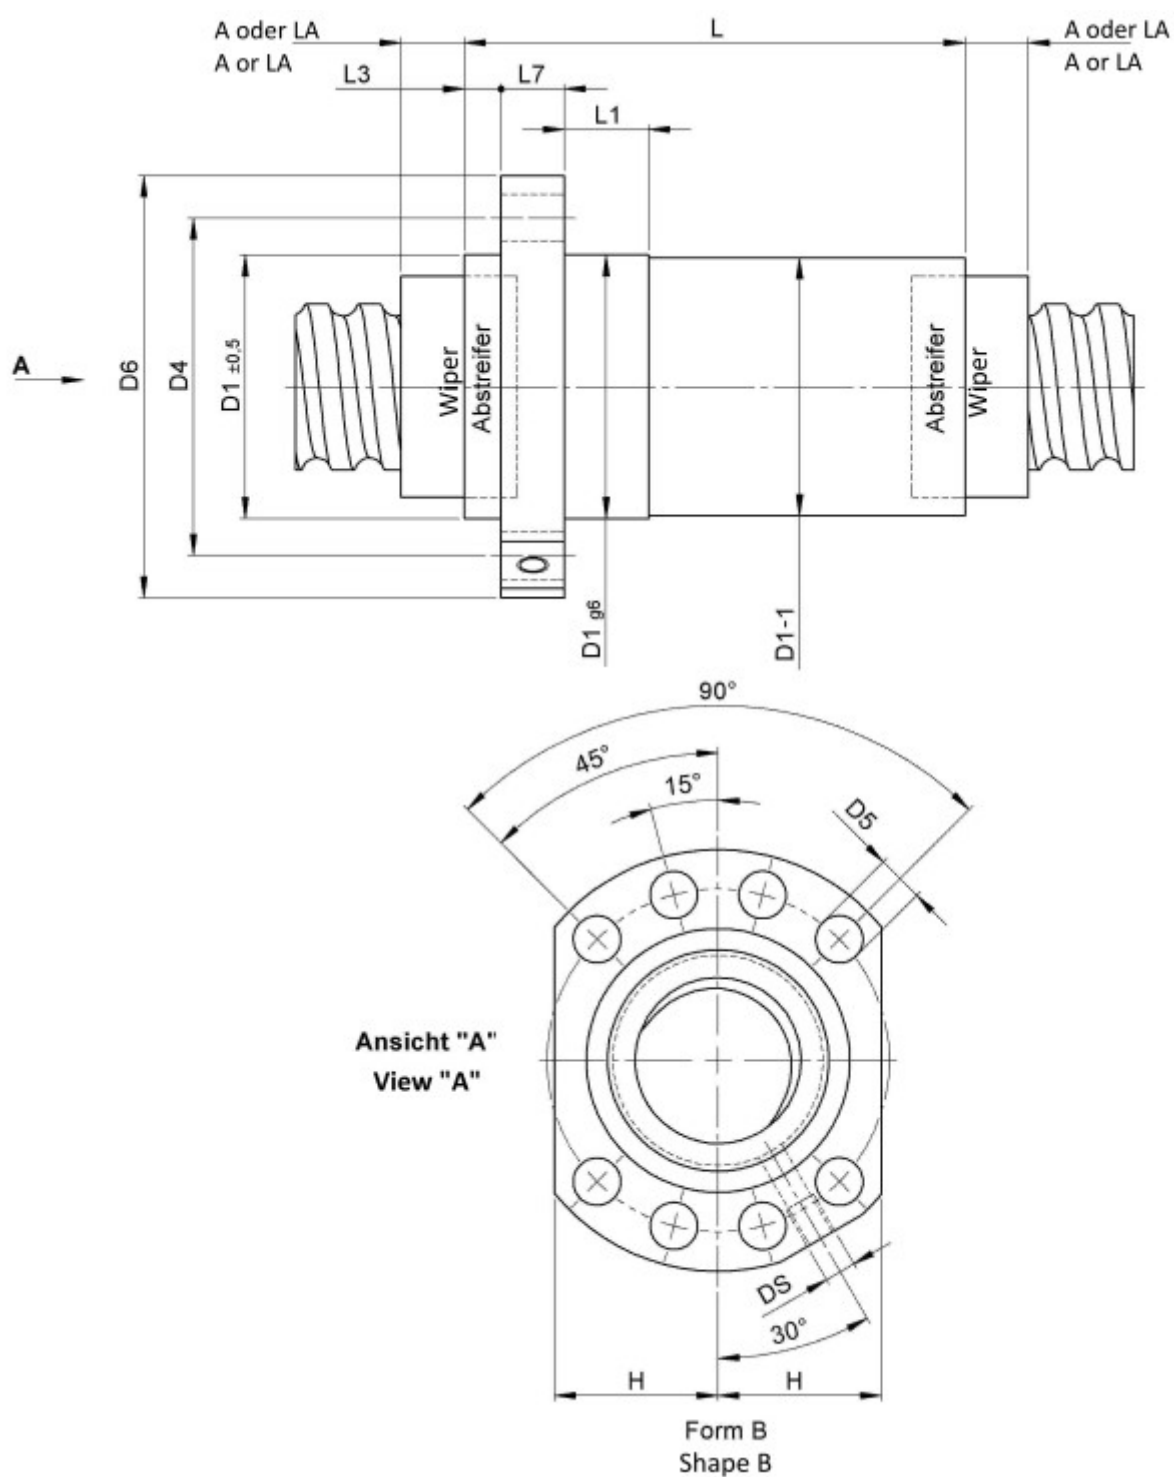

Series			1556	Flange thickness	[mm]	L7	20
Nominal diameter	[mm]	dN	63	Dynamic load capacity	[kN]	Ca	147,70
Lead	[mm]	P	20	Static load capacity	[kN]	C0a	278,80
Ball circles		i	2x4	Additional wiper extensions for combination wipers	[mm]	LA	12
Ball diameter	[mm]	dW	11	Pilot Length	[mm]	L1	25
DN-value			126000	Pilot diameter	[mm]	D1	95
No. of starts			1	Pilot diameter tolerance	[mm]		g6
Friction torque FROM	[Ncm]		279,1	Bolt circle diameter	[mm]	D4	115
Friction torque TO	[Ncm]		465,2	Flange hole diameter		D5	13,5
Accuracy			T	Lube hole	[mm]	DS	M8x1
Nut length	[mm]	L	277	Flange diameter	[mm]	D6	135
Wiper extension	[mm]	L3	7	Flange flat dimension	[mm]	H	50

August Steinmeyer GmbH & Co. KG | Riedstraße 7 | 72458 Albstadt | Phone +49 (0) 7431 1288-0 | Fax +49 (0) 7431 1288-89 | info@steinmeyer.com

Drive Technology, Ball Screws, Precision Ball Screws, Miniature Ball Screws, Ultra Thrust Ball Screws, Rotating Nuts, Cooled Ball Screws, Precision Lead Screws, Differential Rolled Screws, Rolled Ball Screws