


1514/10.63.7,5.6

DESCRIPTION

TECHNICAL DATA AND DIMENSIONS

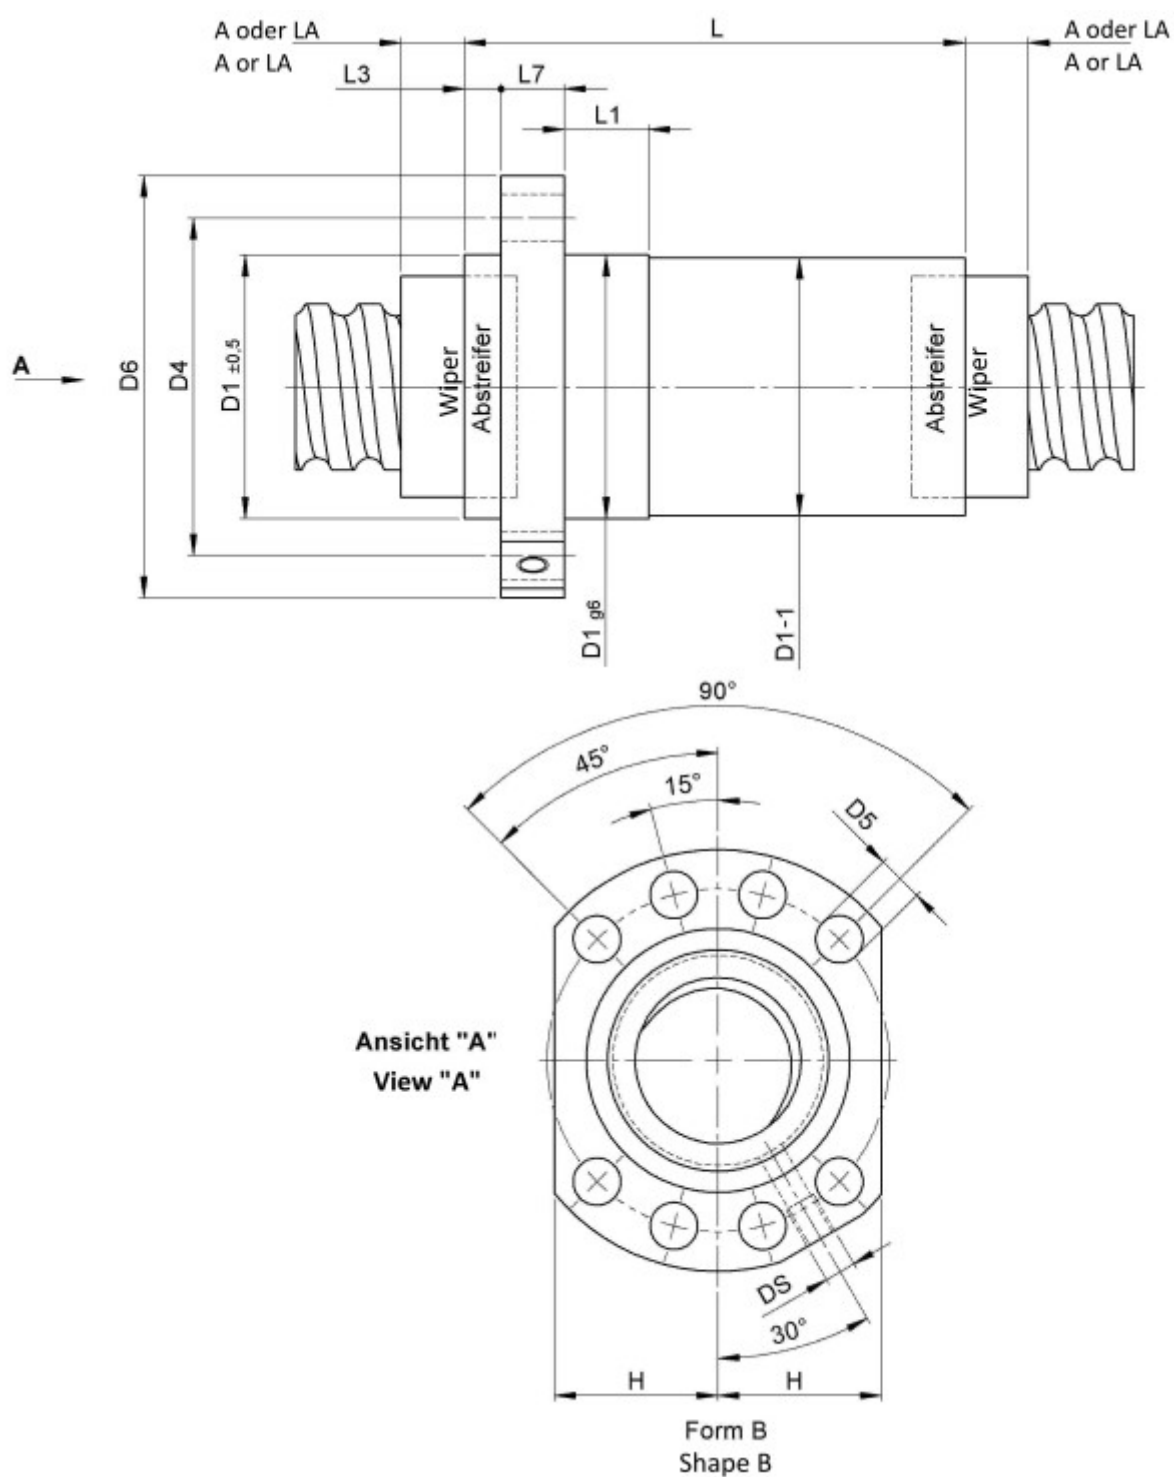

Series			1514	Friction torque FROM		[Ncm]	203,0
Nominal diameter	[mm]	dN	63	Friction torque TO		[Ncm]	338,3
Lead	[mm]	P	10	Max. preload		[kN]	10,74
Ball circles		i	2x6	Accuracy			P
Ball diameter	[mm]	dW	7,5	Nut length		[mm]	L 210
DN-value			126000	Dynamic load capacity		[kN]	Ca 107,40
No. of starts			1	Static load capacity		[kN]	C0a 241,30
Stiffness	[N/μm]	Rnu,ar	1930	Flange diameter		[mm]	D6 130

August Steinmeyer GmbH & Co. KG | Riedstraße 7 | 72458 Albstadt | Phone +49 (0) 7431 1288-0 | Fax +49 (0) 7431 1288-89 | info@steinmeyer.com

Drive Technology, Ball Screws, Precision Ball Screws, Miniature Ball Screws, Ultra Thrust Ball Screws, Rotating Nuts, Cooled Ball Screws, Precision Lead Screws, Differential Rolled Screws, Rolled Ball Screws