


1556/20.63.11.3

DESCRIPTION

TECHNICAL DATA AND DIMENSIONS

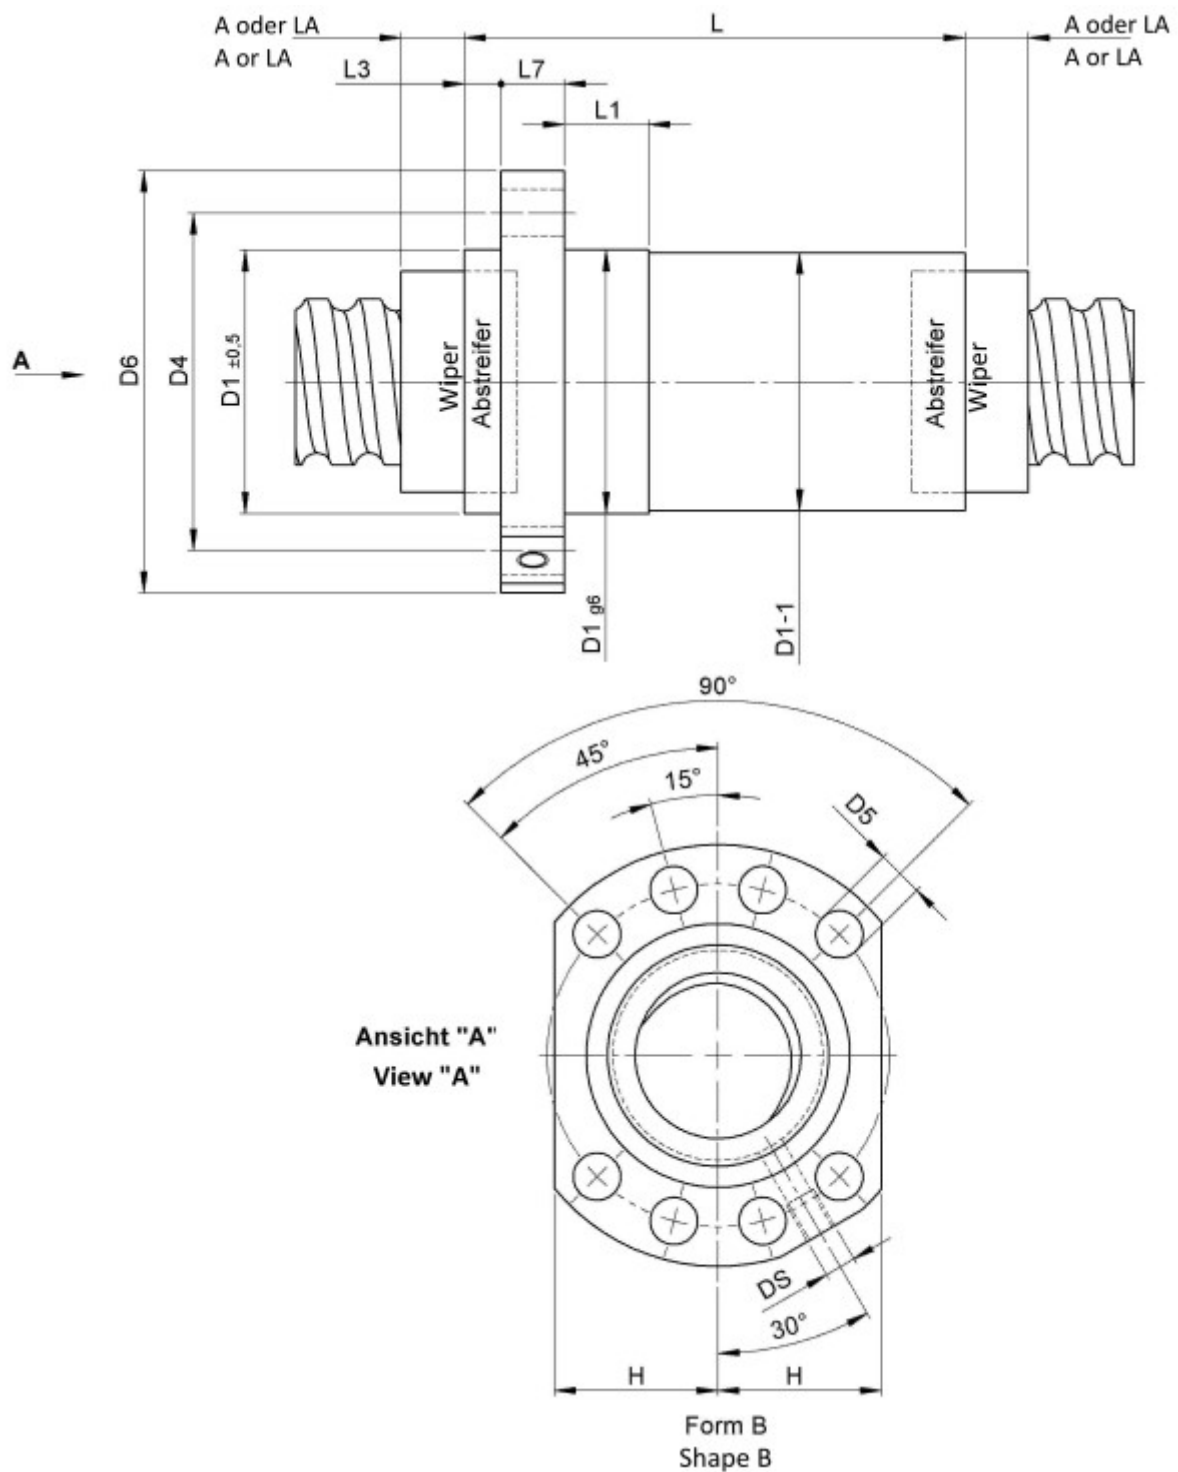

Series			1556	Dynamic load capacity	[kN]	Ca	115,30
Nominal diameter	[mm]	dN	63	Static load capacity	[kN]	C0a	209,10
Lead	[mm]	P	20	Ball circles		i	3+3
Additional wiper extensions for combination wipers	[mm]	LA	12	Ball diameter	[mm]	dW	11
Pilot Length	[mm]	L1	25	DN-value			126000
Pilot diameter	[mm]	D1	95	No. of starts			1
Pilot diameter tolerance	[mm]		g6	Friction torque FROM	[Ncm]		217,9
Bolt circle diameter	[mm]	D4	115	Friction torque TO	[Ncm]		363,2
Flange hole diameter		D5	13,5	Accuracy			T
Lube hole	[mm]	DS	M8x1	Nut length	[mm]	L	212
Flange diameter	[mm]	D6	135	Wiper extension	[mm]	L3	7
Flange flat dimension	[mm]	H	50	Flange thickness	[mm]	L7	20

August Steinmeyer GmbH & Co. KG | Riedstraße 7 | 72458 Albstadt | Phone +49 (0) 7431 1288-0 | Fax +49 (0) 7431 1288-89 | info@steinmeyer.com

Drive Technology, Ball Screws, Precision Ball Screws, Miniature Ball Screws, Ultra Thrust Ball Screws, Rotating Nuts, Cooled Ball Screws, Precision Lead Screws, Differential Rolled Screws, Rolled Ball Screws