



1214/4.8.80.138

DESCRIPTION


- Nut Series 1214 with internal ball return
- Cylindrical nut with 4-point-contact, without wipers
- Nut shape design for assembling in a housing
- Single start ball thread, ground execution according to accuracy class P1 - P5
- Miniature ball screws also available with axial play

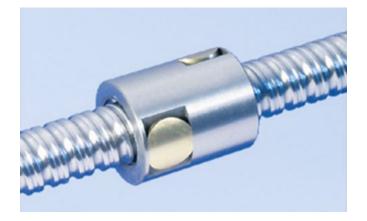

TECHNICAL DATA AND DIMENSIONS

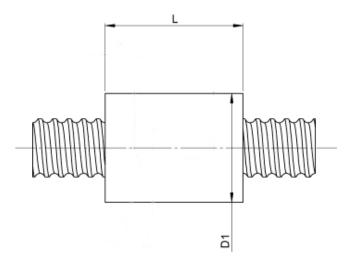



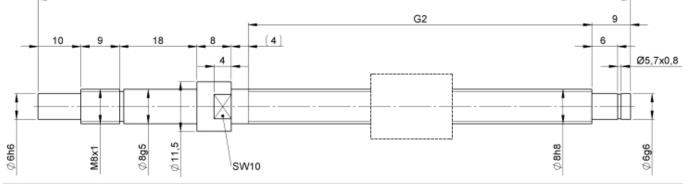

Series			1214	No. of starts			1
Nominal diameter	[mm]	dN	8	Pilot diameter	[mm]	D1	15
Lead	[mm]	Р	4	Nut length	[mm]	L	22
Ball circles		i	1x3	Dynamic load capacity	[kN]	Ca	2,00
Ball diameter	[mm]	dW	1,5	Static load capacity	[kN]	C0a	2,10
DN-value			120000	Pilot diameter tolerance	[mm]		h6

August Steinmeyer GmbH & Co. KG | info@steinmeyer.com

Drive Technology, Ball Screws, Precision Ball Screws, Miniature Ball Screws, Ultra Thrust Ball Screws, Rotating Nuts, Cooled Ball Screws, Precision Lead Screws, Differential Rolled Screws, Rolled Ball Screws